




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Maleic acid

CAS: 110-16-7

Molecular weight: 116.07

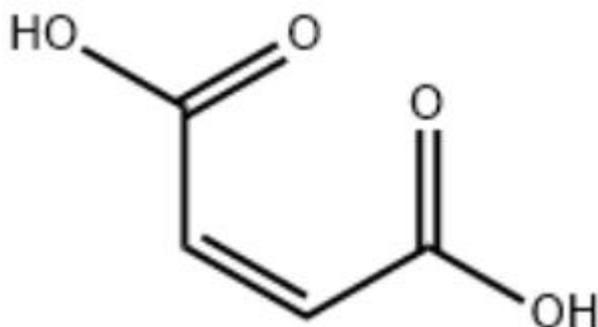

Item	Standard
Melting point	130-135 °C (lit.)
Boiling point	275°C
Density	1.59 g/mL at 25 °C (lit.)
Vapor pressure	0.001Pa at 20°C
Refractive index	1.5260 (estimate)
Flash point	127 °C
LogP	-1.3 at 20°C
Acidity coefficient (pKa)	1.83(at 25 °C)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Maleic acid, also known as maleic acid, is mainly used in the production of pesticides maratha, darcinone, synthetic unsaturated polyester resin, pine balsam, tartaric acid, fumaric acid, succinic acid and other products, but also used in pharmaceuticals, coatings, food and printing and dyeing AIDS and grease preservatives. Maleic acid slows the rancidity of oils and fats and can be used as a preservative and organic synthesis of oils and fats.

Package:

25kg/drum or according to customer requirements.

Unilong Industry